

ETGT12 22ft - 34ft Beavertail 12K Tandem Dual Gooseneck 6' HD Ramps




Standard Features

- Lockable Front Toolbox
- Spring Assist Steel Full Width Max Ramps
- Engineered One Piece Continuous Weld Gooseneck
- Engineered Robotically Welded Continuous Main Beam
- Plank Deck
- Dual Wheels
- Precambered Deck

- Low Profile Bed, Pierced-Beam Frame
- 25,000 lb. Bolt-on Safety Chains & Hooks
- LED Lighting Package

Specifications

Coupler:	2 5/16" Ball Coupler 30,000 lb.	Axle:	(2) 12,000 lb. w/ Electric Brakes		
Safety Chains:	26,400 lb. 3/8" x 35" w/Clevis Slip Hook	Suspension:	Multi-Leaf Spring w/ Equalizer		
Crossmember:	S3.0" X 2.9 LBS High Tensile Super Lite Beam: 16" Centers	Wheels:	ST235/80R16 E 10 Ply 16 x 6; Steel 8 Bolt, dual wheels		
Lights:	L.E.D. D.O.T. Stop, Tail, Turn & Clearance	Brakes:	Electric		
Floor:	2' x 8' Spruce Kiln Dried Dimensional Lumber	Elec. Plug:	Cold Weather 7 Wire RV Plug		
Jack:	12,000 lb. bolt-on 13.5" Lift Drop Leg Spring Loaded front Pull Pin				
Frame:	Engineered Built Up Main Beam Web: 90 Ksi High Strength Steel Flanges: 4" x 3/8" Steel Bar				
Side Rails:	5" x 2" HSS Tubing; 2" x 3/8" Rub Rail, Stake Pockets, and Chain Spools, 24" spacing				
Neck:	Engineered Built I Beam Web: 90 Ksi High Strength Steel Flanges: 4" x 3/8" Steel Bar				

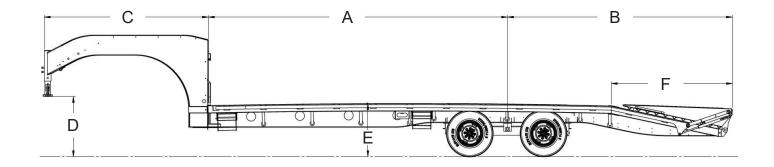

Dimensions

Model	Α	В	С	D	Ε	F
ETGT12-22+6	197"	147.5"	110.375"	39.5"	32.00"	79.375"
ETGT12-24+6	221"	147.5"	110.375"	39.5"	32.75"	79.375"
ETGT12-26+6	245"	147.5"	110.375"	39.5"	33.50"	79.375"
ETGT12-28+6	269"	147.5"	110.375"	39.5"	34.25"	79.375"
ETGT12-30+6	293"	147.5"	110.375"	39.5"	35.25"	79.375"
ETGT12-32+6	317"	147.5"	110.375"	39.5"	36.00"	79.375"
ETGT12-34+6	341"	147.5"	110.375"	39.5"	37.00"	79.375"

Model	Description	Net Weight	GVWR	Payload Cap.
ETGT12-22+6	22' 12,000 lbs. Tandem Axle Dual Black	7,129 lb.	29,000 lb.	21,871 lb.
ETGT12-24+6	24' 12,000 lbs. Tandem Axle Dual Black	7,348 lb.	29,000 lb.	21,652 lb.
ETGT12-26+6	26' 12,000 lbs. Tandem Axle Dual Black	7,568 lb.	29,000 lb.	21,432 lb.
ETGT12-28+6	28' 12,000 lbs. Tandem Axle Dual Black	7,789 lb.	29,000 lb.	21,211 lb.
ETGT12-30+6	30' 12,000 lbs. Tandem Axle Dual Black	8,009 lb.	29,000 lb.	20,991 lb.
ETGT12-32+6	32' 12,000 lbs. Tandem Axle Dual Black	8,230 lb.	29,000 lb.	20,770 lb.
ETGT12-34+6	34' 12,000 lbs. Tandem Axle Dual Black	8,450 lb.	29,000 lb.	20,550 lb.









