



SOUTHLAND
TRAILER CORP.

ETGT10 22ft - 34ft Beavertail 10K Tandem Dual Gooseneck 6' HD Ramps




Standard Features

- Lockable Front Toolbox
- Spring Assist Steel Full Width Max Ramps
- Engineered One Piece Continuous Weld Gooseneck
- Engineered Robotically Welded Continuous Main Beam
- Plank Deck
- Dual Wheels
- Precambered Deck
- Low Profile Bed, Pierced-Beam Frame
- 25,000 lb. Bolt-on Safety Chains & Hooks
- LED Lighting Package

Specifications

| | | | |
|-----------------------|--|--------------------|--|
| Coupler: | 2 5/16" Ball Coupler 30,000 lb. | Axle: | (2) 10,000 lb. w/ Electric Brakes |
| Safety Chains: | 25,000 lb. 3/8" X 35" w/ Clevis Slip Hook | Suspension: | Multi-Leaf Spring w/ Equalizer |
| Crossmember: | S3.0" X 2.9 LBS High Tensile Super Lite Beam: 16" Centers | Wheels: | ST235/80R16 E 10 Ply 16 x 6; Steel 8 Bolt, dual wheels |
| Lights: | L.E.D. D.O.T. Stop, Tail, Turn & Clearance | Brakes: | Electric |
| Floor: | 2x8 Spruce Kiln Dried dimensional lumber | Elec. Plug: | Cold Weather 7 Wire RV Plug |
| Jack: | 12,000 lb. bolt-on 13.5" Lift Drop Leg Spring Loaded front Pull Pin | | |
| Frame: | Engineered Built Up Main Beam Web: 90 Ksi High strength steel Flanges: 4" x 0.375" steel bar | | |
| Side Rails: | 5" x 2" HSS Tubing 2" x 0.375" rub rail, Stake pockets and chain spools, 24" spacing | | |
| Neck: | Engineered Built I Beam Web: 90 Ksi High strength steel Flanges: 4" x 0.375" steel bar | | |

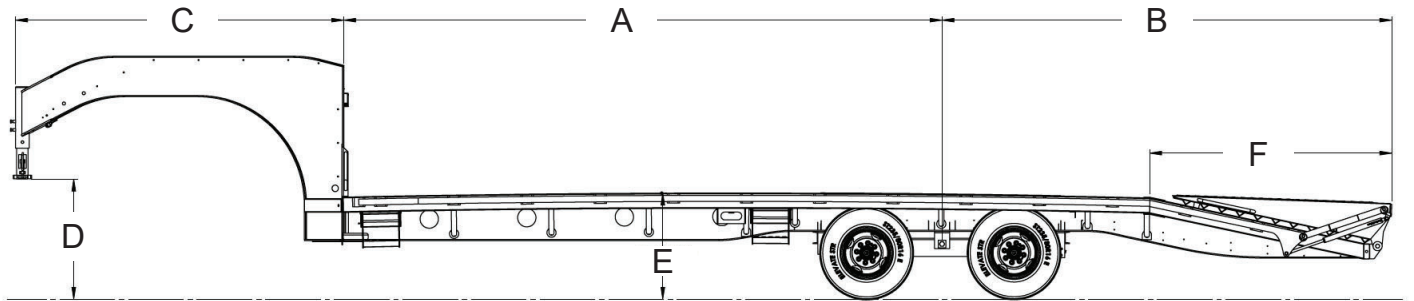

Dimensions

| Model | A | B | C | D | E | F |
|-------------|------|--------|----------|-----|--------|---------|
| ETGT10-22+6 | 197" | 147.5" | 110.375" | 40" | 32.50" | 79.375" |
| ETGT10-24+6 | 221" | 147.5" | 110.375" | 40" | 33.25" | 79.375" |
| ETGT10-26+6 | 245" | 147.5" | 110.375" | 40" | 34.00" | 79.375" |
| ETGT10-28+6 | 269" | 147.5" | 110.375" | 40" | 34.75" | 79.375" |
| ETGT10-30+6 | 293" | 147.5" | 110.375" | 40" | 35.75" | 79.375" |
| ETGT10-32+6 | 317" | 147.5" | 110.375" | 40" | 36.50" | 79.375" |
| ETGT10-34+6 | 341" | 147.5" | 110.375" | 40" | 37.50" | 79.375" |

| Model | Description | Net Weight | GVWR | Payload Cap. |
|-------------|--|------------|------------|--------------|
| ETGT10-22+6 | 22' 10,000 lbs. Tandem Axle Dual Black | 6,776 lb. | 25,000 lb. | 18,224 lb. |
| ETGT10-24+6 | 24' 10,000 lbs. Tandem Axle Dual Black | 6,995 lb. | 25,000 lb. | 18,005 lb. |
| ETGT10-26+6 | 26' 10,000 lbs. Tandem Axle Dual Black | 7,216 lb. | 25,000 lb. | 17,784 lb. |
| ETGT10-28+6 | 28' 10,000 lbs. Tandem Axle Dual Black | 7,436 lb. | 25,000 lb. | 17,564 lb. |
| ETGT10-30+6 | 30' 10,000 lbs. Tandem Axle Dual Black | 7,657 lb. | 25,000 lb. | 17,343 lb. |
| ETGT10-32+6 | 32' 10,000 lbs. Tandem Axle Dual Black | 7,877 lb. | 25,000 lb. | 17,123 lb. |
| ETGT10-34+6 | 34' 10,000 lbs. Tandem Axle Dual Black | 8,098 lb. | 25,000 lb. | 16,902 lb. |



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Products. - Revised November 2023